
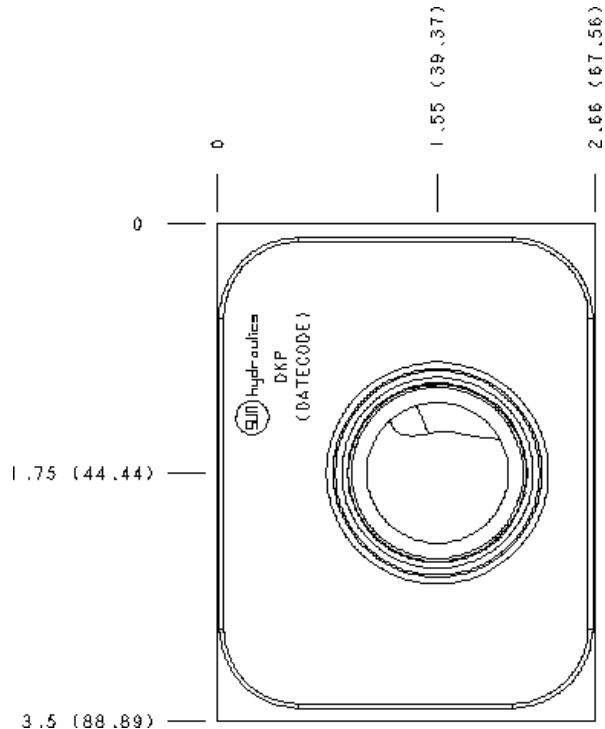


MODELL
DKP

In P
EINSCHRAUBBOHRUNG: T-16A

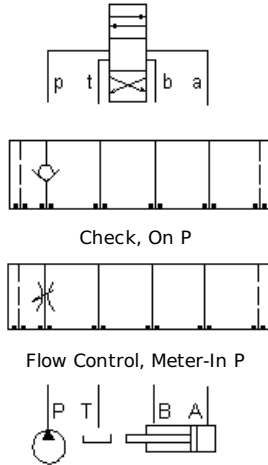

KONFIGURATION ÄNDERN

(none) Modifier 6061-T651
Aluminum, Buna-N

KOMPONENTEN

Part	Beschreibung	Anzahl
500-001-111	O-Ring	2
500-001-118	O-Ring	4
700-006	Seal Plate	1
811-001-006	Pin	2

BEMERKUNGEN

For check valve application, use only with CX*A check valves - free flow nose to side.


Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

TECHNISCHE DATEN


Gehäusotyp	Sandwich
Lochbild	ISO 07
Gehäuseeigenschaften	in P
Verkettungshöhe	70 mm
Einschraubbohrung	T-16A
Open Cavities	1

SYMBOLS

Check, On P



Flow Control, Meter-In P



CONFIGURATION OPTIONS

MODIFIER


		6061-T651 Aluminum, Buna-N
Standard Options	/S	65-45-12 Ductile Iron, Buna-N, Blackened
	/V	6061-T651 Aluminum, Viton
	/Y	65-45-12 Ductile Iron, Viton, Blackened

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

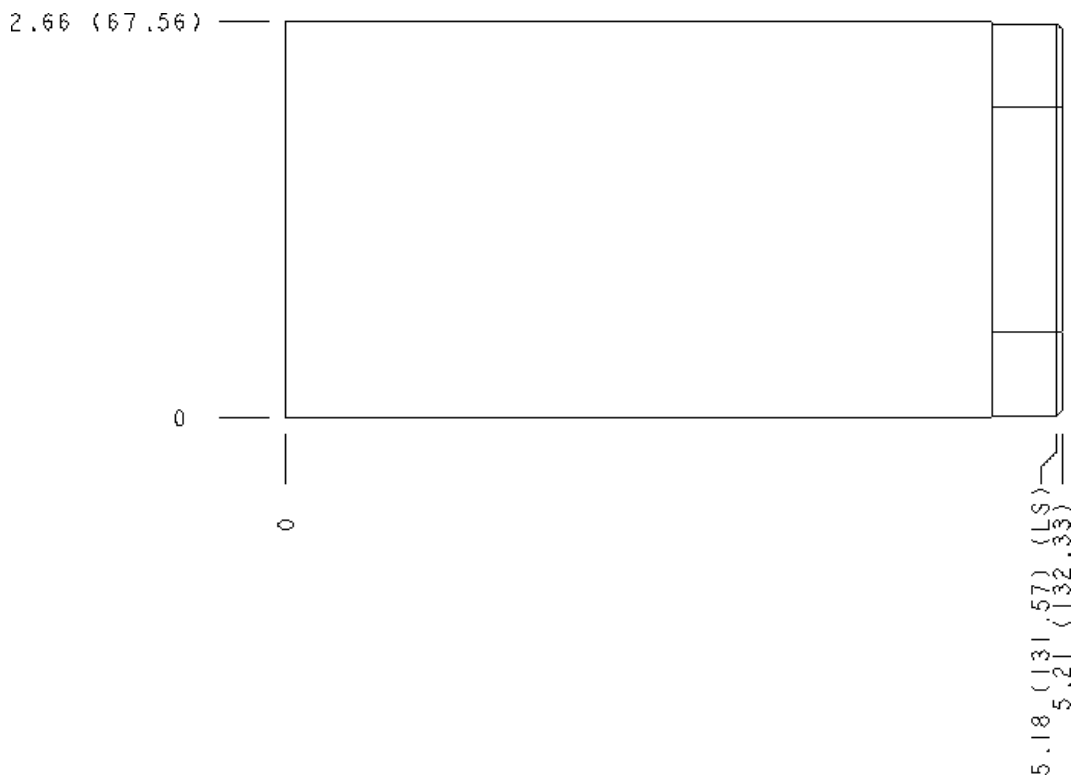


Face 5

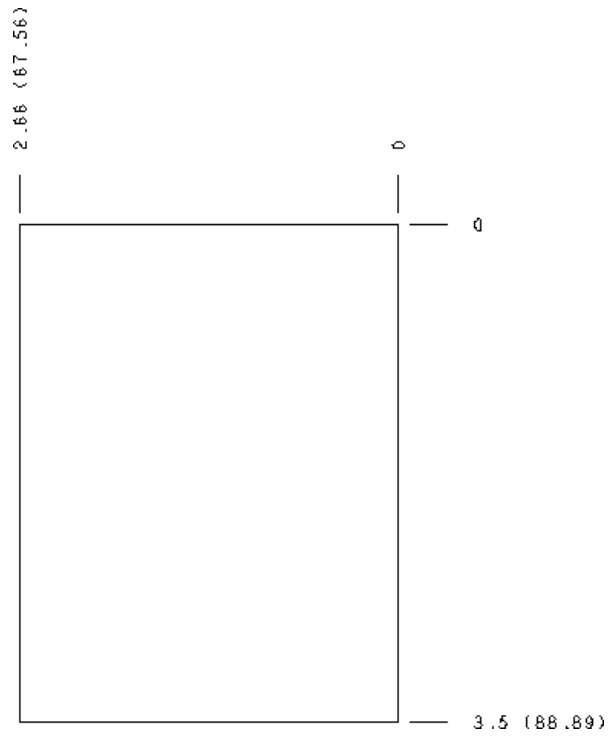


Face 6

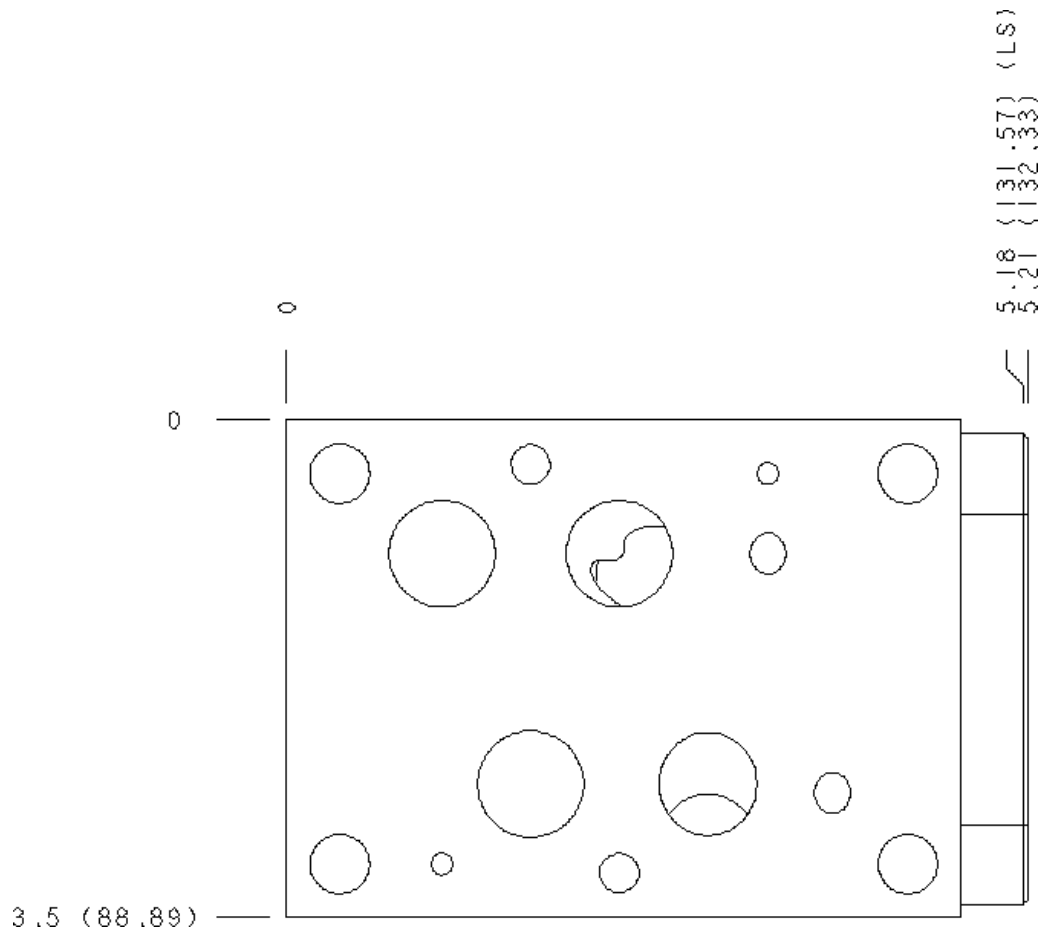


Face 7

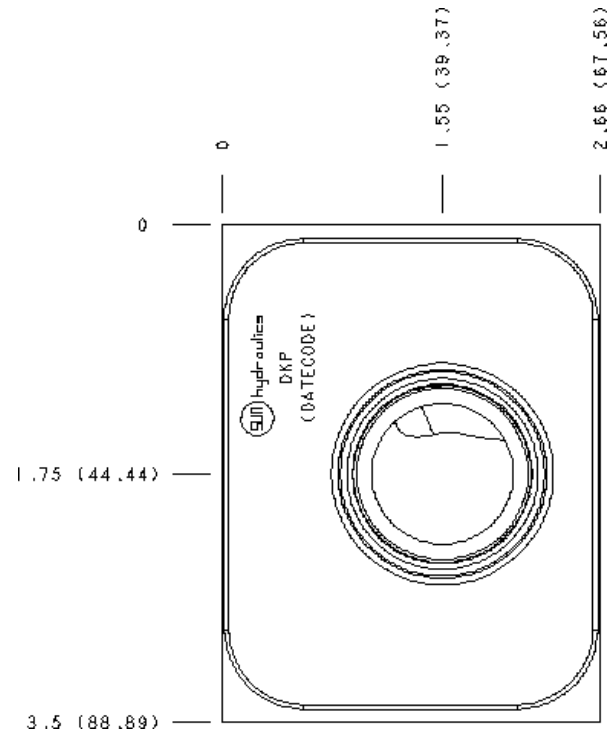

Face 8

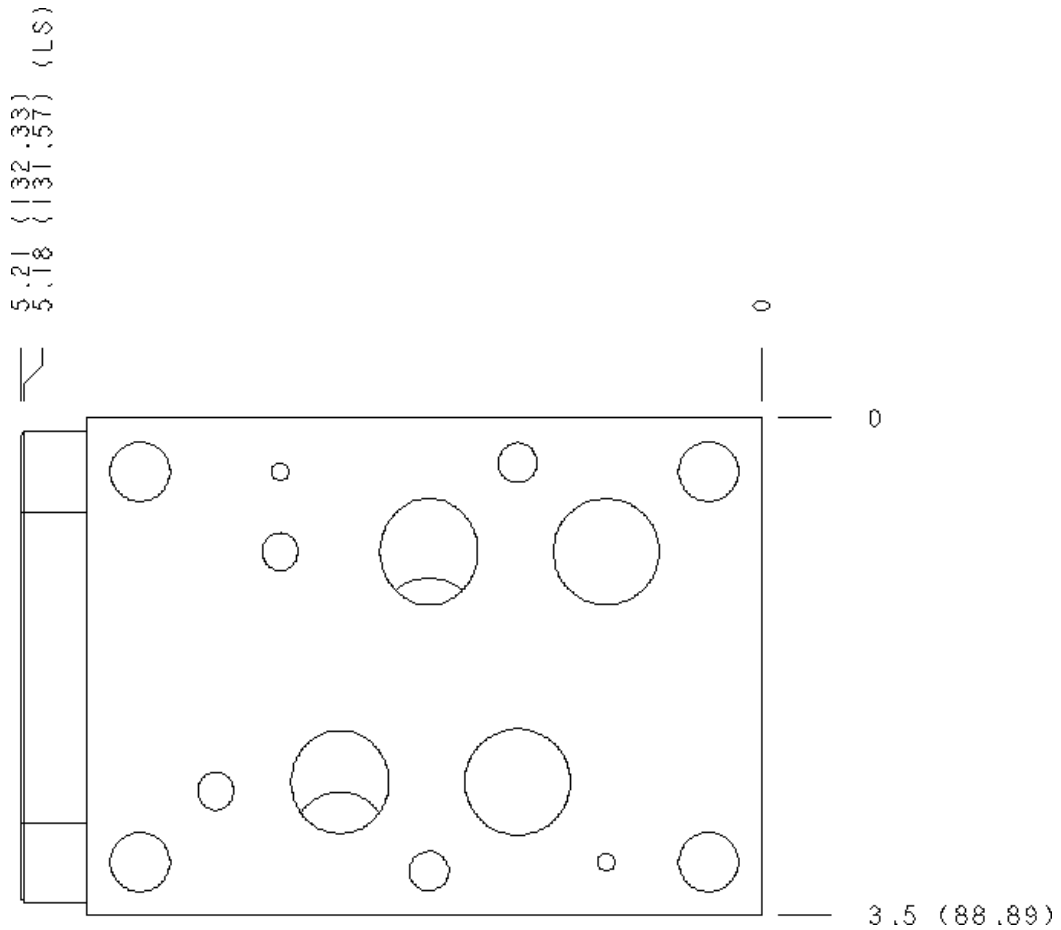

Face 10

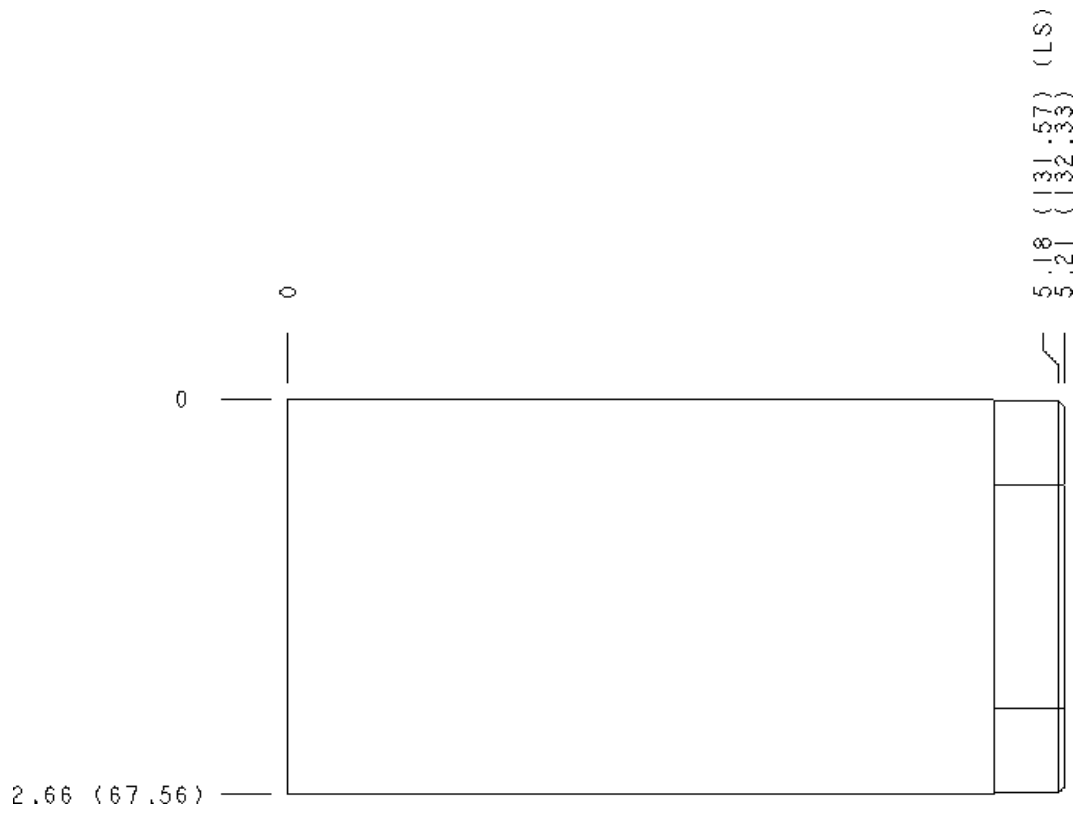

Copyright © 2002-2014 Sun Hydraulics Corporation. All rights reserved.